

# QRF-1880-1920-50

## 1.88~1.92GHz, 50dB

**Features:**  
 \* High Stopband Rejection  
 \* Small Size

**Applications:**  
 \* Telecom  
 \* Laboratory Test  
 \* Receivers  
 \* Instrumentation

### Electrical

Passband:	DC~1.86GHz 1.94~5.8GHz
Passband Insertion Loss:	2dB max.
Passband VSWR:	1.5 max.
Stopband:	1.88~1.92GHz
Stopband Attenuation:	50dB min.
Average Power:	50W max.
Impedance:	50Ω

### Mechanical


Size <sup>*1</sup> :	209*45*22mm 8.228*1.772*0.866in
RF Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

### Environmental

Temperature:	-30~+70°C
--------------	-----------

### Outline Drawings

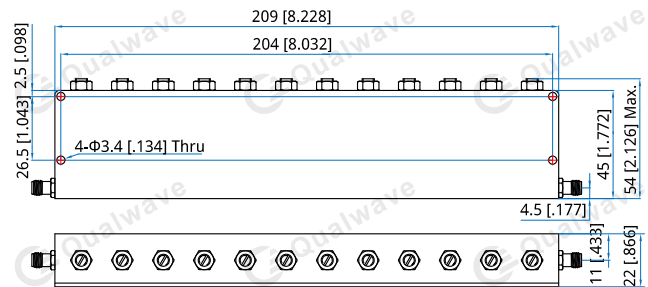

Unit: mm [in]  
Tolerance: ±0.5mm [±0.02in]

### How To Order

**QRF-1880-1920-50**

Customization is available upon request.