

# QRF-2000-2300-50

## 2~2.3GHz, 50dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	DC~1.9GHz 2.4~5.1GHz
Passband Insertion Loss:	1.5dB max.
Passband VSWR:	1.5 max. @0.75~1.9GHz 1.5 max. @2.4~5.1GHz 1.8 max. @DC~0.75GHz
Stopband:	2~2.3GHz
Stopband Attenuation:	50dB min.
Average Power:	10W max.
Impedance:	50Ω

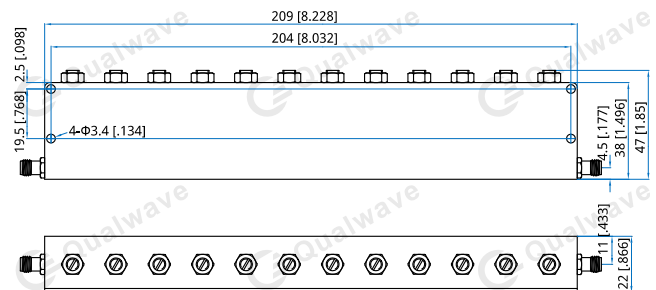
**Mechanical**

Size <sup>*1</sup> :	209*47*22mm 8.228*1.85*0.866in
RF Connectors:	SMA female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

**Environmental**

Temperature:	-30~+70°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.8mm [±0.031in]

**How To Order**

**QRF-2000-2300-50**

Customization is available upon request.