

QRF-2010-2025-60

2.01~2.025GHz, 60dB

Features: * High Stopband Rejection * Small Size	Applications: * Telecom * Laboratory Test * Receivers * Instrumentation
---	--

Electrical

Passband:	DC~2GHz 2.035~6GHz
Passband Insertion Loss:	3dB max. @DC~2GHz, 2.037~6GHz 4dB max. @2.035~2.037GHz
Passband VSWR:	1.5 max.
Stopband:	2.01~2.025GHz
Stopband Attenuation:	60dB min.
Average Power:	20W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	245*47*22mm 9.646*1.85*0.866in
RF Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Temperature: -10~+50°C

Outline Drawings

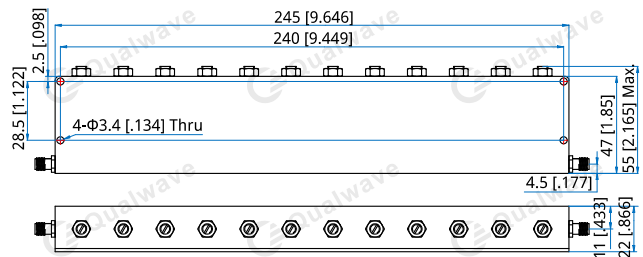

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

QRF-2010-2025-60

Customization is available upon request.