

QRF-2200-2600-50

2.2~2.6GHz, 50dB

- | | |
|---|--|
| Features:
* High Stopband Rejection
* Small Size | Applications:
* Telecom
* Laboratory Test
* Receivers
* Instrumentation |
|---|--|

Electrical

Passband:	DC~2.08GHz 2.72~6GHz
Passband Insertion Loss:	1dB max.
Passband VSWR:	1.5 max. @0.75~2.08GHz, 1.5 max. @2.72~5.5GHz 1.8 max. @DC~0.75GHz 1.8 max. @5.5~6GHz
Stopband:	2.2~2.6GHz
Stopband Attenuation:	50dB min.
Average Power:	10W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	209*34*22mm 8.228*1.339*0.866in
RF Connectors:	SMA female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-10~+50°C
--------------	-----------

Outline Drawings

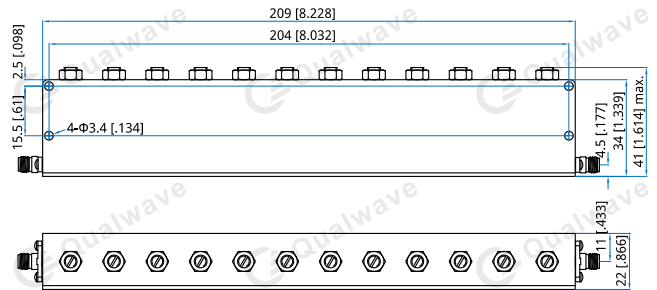

Unit: mm [in]
 Tolerance: ±0.4mm [±0.016in]

How To Order

QRF-2200-2600-50

Customization is available upon request.