

QRF-2300-2400-40

2.3~2.4GHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~2.277GHz 2.423~6.2GHz
Passband Insertion Loss:	2dB max.
Passband VSWR:	1.5 max.
Stopband:	2.3~2.4GHz
Stopband Attenuation:	40dB min.
Average Power:	50W max.
Impedance:	50Ω

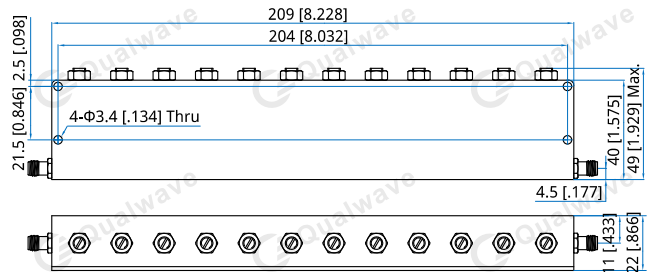
Mechanical

Size ^{*1} :	209*40*22mm 8.228*1.575*0.866in
RF Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-20~+60°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QRF-2300-2400-40

Customization is available upon request.