

QRF-2400-2483.5-50

2.4~2.4835GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~2.375GHz 2.51~7.3GHz
Passband Insertion Loss:	1.0dB max. @DC~2.345GHz, 2.54~7.3GHz 2.5dB max. @2.345~2.375GHz, 2.51~2.54GHz
Passband VSWR:	1.5 max.
Stopband:	2.4~2.4835GHz
Stopband Attenuation:	50dB min.
Average Power:	20W max.
Impedance:	50Ω

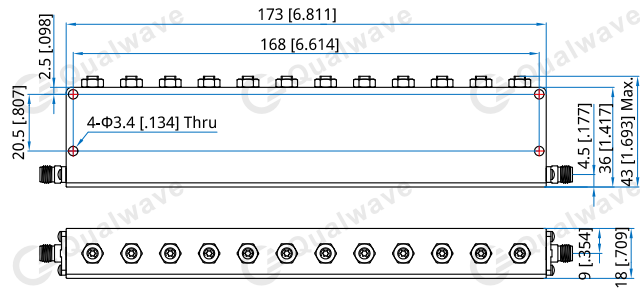
Mechanical

Size*1:	173*36*18mm 6.811*1.417*0.709in
RF Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	0~+40°C
--------------	---------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.4mm [±0.016in]

How To Order

QRF-2400-2483.5-50

Customization is available upon request.