

QRF-2496-2690-50

2.496~2.69GHz, 50dB

- | | |
|---|--|
| Features:
* High Stopband Rejection
* Small Size | Applications:
* Telecom
* Laboratory Test
* Receivers
* Instrumentation |
|---|--|

Electrical


Passband:	DC~2.4GHz 2.79~5.2GHz
Passband Insertion Loss:	1dB max.
Passband VSWR:	1.7 max.
Stopband:	2.496~2.69GHz
Stopband Attenuation:	50dB min.
Average Power:	20W max.
Impedance:	50Ω

Mechanical

Size ^{*1} :	209*38*22mm 8.228*1.496*0.866in
RF Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Outline Drawings

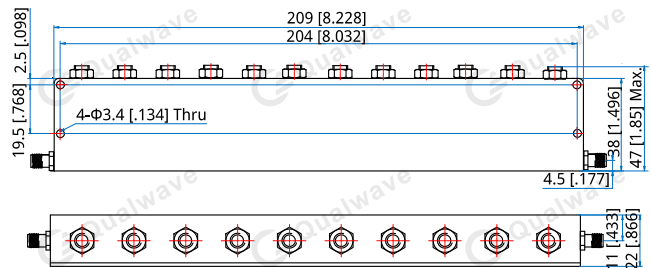

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QRF-2496-2690-50

Customization is available upon request.