

QRF-3300-4200-50

3.3~4.2GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~3.03GHz 4.47~8GHz
Passband Insertion Loss:	1dB max.
Passband VSWR:	1.7 max.
Stopband:	3.3~4.2GHz
Stopband Attenuation:	50dB min.
Average Power:	5W max.
Impedance:	50Ω

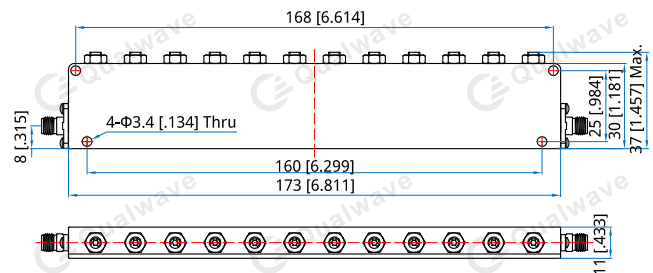
Mechanical

Size ^{*1} :	168*30*11mm 6.614*1.181*0.433in
RF Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	+15~+30°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.4mm [±0.016in]

How To Order

QRF-3300-4200-50

Customization is available upon request.