

# QRF-47-68-30

## 47~68MHz, 30dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	DC~32MHz 95~1000MHz
Passband Insertion Loss:	2dB max.
Passband VSWR:	1.8 max.
Stopband:	47~68MHz
Stopband Attenuation:	30dB min.
Average Power:	0.25W max.
Impedance:	50Ω

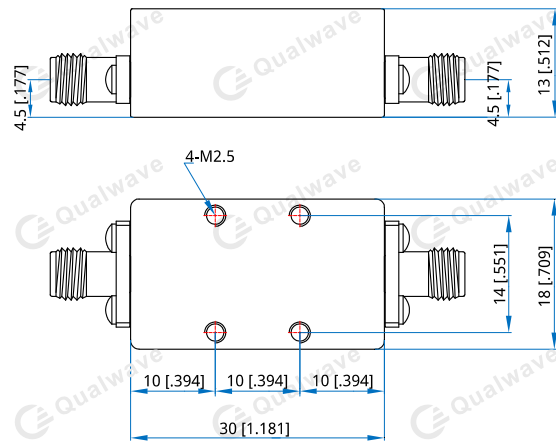
**Mechanical**

Size <sup>*1</sup> :	30*18*13mm 1.181*0.709*0.512in
RF Connectors:	SMA Female
Mounting:	4-M2.5 through-hole

[1] Exclude connectors.

**Environmental**

Temperature:	-30~+70°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

**How To Order**

**QRF-47-68-30**

Customization is available upon request.