

QRF-47-68-45

47~68MHz, 45dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~32MHz 95~1000MHz
Passband Insertion Loss:	2dB max.
Passband VSWR:	1.4 max.
Stopband:	47~68MHz
Stopband Attenuation:	45dB min.
Impedance:	50Ω

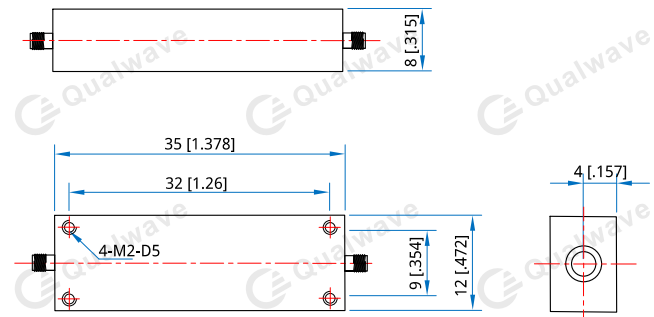
Mechanical

Size ^{*1} :	35*128mm 1.378*0.472*0.315in
RF Connectors:	SMA Female
Mounting:	4-M2 Depth 5mm

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QRF-47-68-45

Customization is available upon request.