

# QRF-5150-5850-50

## 5.15~5.85GHz, 50dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	DC~4.95GHz 6.05~11.5GHz
Passband Insertion Loss:	1.5dB max.
Passband VSWR:	1.7 max.
Stopband:	5.15~5.85GHz
Stopband Attenuation:	50dB min.
Average Power:	5W max.
Impedance:	50Ω

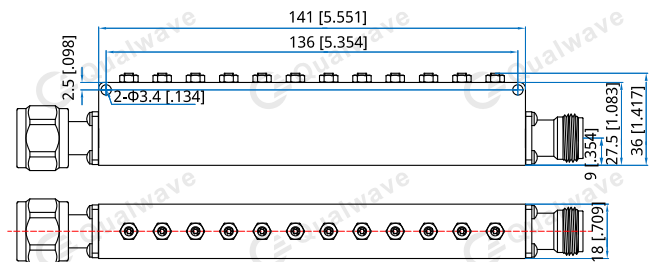
**Mechanical**

Size*1:	141*36*18mm 5.551*1.417*0.709in
Input Connector:	N Male/N Female
Mounting:	2-Φ3.4mm through-hole

[1] Exclude connectors.

**Environmental**

Temperature:	-30~+70°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.8mm [±0.031in]

**How To Order**

**QRF-5150-5850-50**

Customization is available upon request.