

QRF-703-748-40

0.703~0.748GHz, 40dB

- | | |
|---|--|
| Features:
* High Stopband Rejection
* Small Size | Applications:
* Telecom
* Laboratory Test
* Receivers
* Instrumentation |
|---|--|

Electrical

Passband:	DC~0.683GHz 0.768~2GHz
Passband Insertion Loss:	1.5dB max.
Passband VSWR:	1.5 max.
Stopband:	0.703~0.748GHz
Stopband Attenuation:	40dB min.
Average Power:	10W max.
Impedance:	50Ω

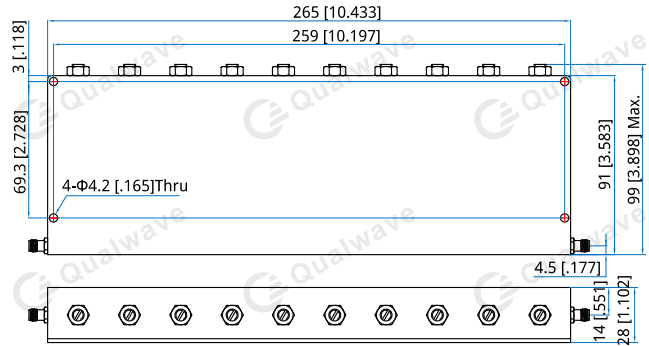
Mechanical

Size ^{*1} :	265*91*28mm 10.433*3.583*1.102in
RF Connectors:	SMA Female
Mounting:	4-Φ4.2mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-20~+60°C
--------------	-----------

Outline Drawings


Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QRF-703-748-40

Customization is available upon request.