

QRF-791-821-50

0.791~0.821GHz, 50dB

- | | |
|---|--|
| Features:
* High Stopband Rejection
* Small Size | Applications:
* Telecom
* Laboratory Test
* Receivers
* Instrumentation |
|---|--|

Electrical


Passband:	DC~0.773GHz 0.839~2.5GHz
Passband Insertion Loss:	1.5dB max.
Passband VSWR:	1.5 max. @DC~0.773GHz, 0.839~2.2GHz 1.6 max. @2.2~2.5GHz
Stopband:	0.791~0.821GHz
Stopband Attenuation:	50dB min.
Average Power:	50W max.
Impedance:	50Ω

Mechanical

Size ^{*1} :	239*84*28mm 9.409*3.307*1.102in
RF Connectors:	SMA Female
Mounting:	4-Φ4.2mm through-hole

[1] Exclude connectors.

Outline Drawings

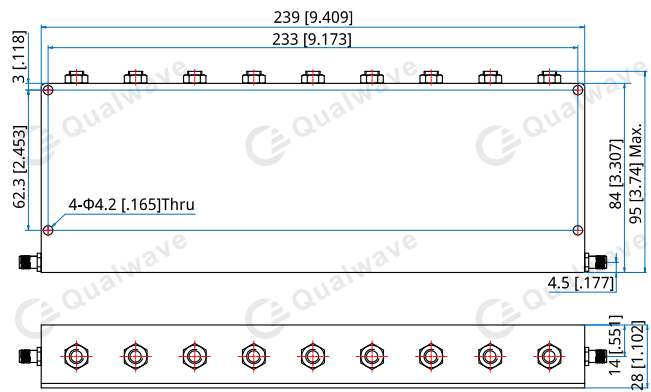

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

QRF-791-821-50

Customization is available upon request.