

# QRF-791-821-60

## 0.791~0.821GHz, 60dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	DC~0.771GHz 0.854~2.4GHz
Passband Insertion Loss:	1.2dB max.
Passband VSWR:	1.5 max. @DC~0.771GHz, 0.854~2.25GHz 1.7 max. @2.25~2.4GHz
Stopband:	0.791~0.821GHz
Stopband Attenuation:	60dB min.
Average Power:	10W max.
Impedance:	50Ω

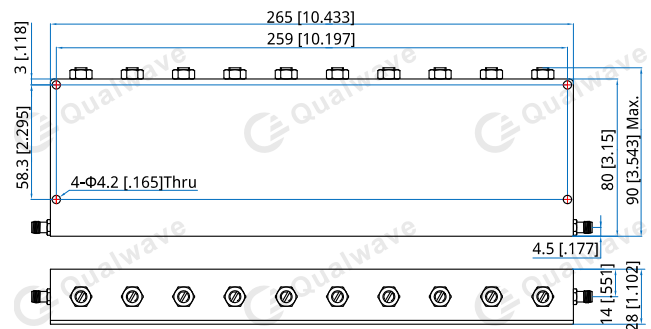
**Mechanical**

Size <sup>*1</sup> :	265*80*28mm 10.433*3.15*1.102in
RF Connectors:	SMA Female
Mounting:	4-Φ4.2mm through-hole

[1] Exclude connectors.

**Environmental**

Temperature:	0~+40°C
--------------	---------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

**How To Order**

**QRF-791-821-60**

Customization is available upon request.