

QRF-832-862-40

0.832~0.862GHz, 40dB

- | | |
|---|--|
| Features:
* High Stopband Rejection
* Small Size | Applications:
* Telecom
* Laboratory Test
* Receivers
* Instrumentation |
|---|--|

Electrical


Passband:	DC~0.812GHz 0.882~2.4GHz
Passband Insertion Loss:	1dB max.
Passband VSWR:	1.5 max.
Stopband:	0.832~0.862GHz
Stopband Attenuation:	40dB min.
Average Power:	50W max.
Impedance:	50Ω

Mechanical

Size ^{*1} :	221*82*28mm 8.701*3.228*1.102in
RF Connectors:	SMA Female
Mounting:	4-Φ4.2mm through-hole

[1] Exclude connectors.

Outline Drawings

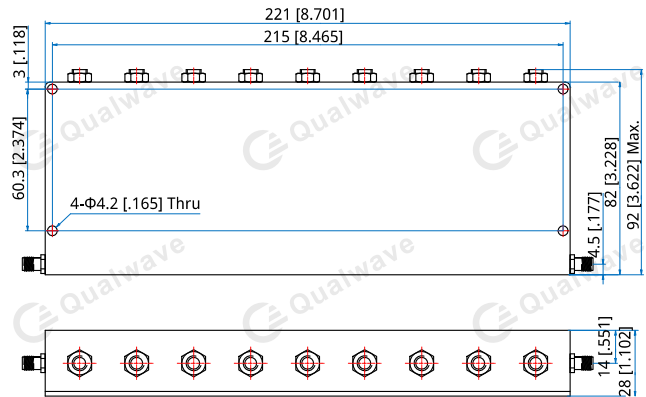

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QRF-832-862-40

Customization is available upon request.