

QRF-880-915-40

0.88~0.915GHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~0.865GHz 0.93~2.7GHz
Passband Insertion Loss:	2dB max.
Passband VSWR:	1.5 max.
Stopband:	0.88~0.915GHz
Stopband Attenuation:	40dB min.
Average Power:	20W max.
Impedance:	50Ω

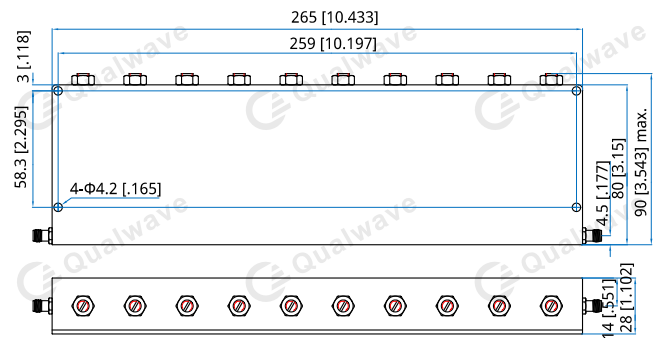
Mechanical

Size ^{*1} :	265*90*28mm 10.433*3.543*1.102in
RF Connectors:	SMA female
Mounting:	4-Φ4.2mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-10~+50°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.8mm [±0.031in]

How To Order

QRF-880-915-40

Customization is available upon request.