

# QLB-18200-20200-60-150-1

18.2~19.2GHz, 19.2~20.2GHz, 60dB, 150K, Ka-Band

**Features:**

- \* Broad Band
- \* Low Noise Temperature
- \* Low Input VSWR

**Applications:**

- \* Fixed Station
- \* Mobile Station
- \* Laboratory Test

**Electrical**

Gain:	60dB
Gain Flatness:	4.0dBp-p max.
Noise Temperature:	150K
Output Power (Psat):	10dBm min.
Input/Output VSWR:	2.5/2.0
Phase Noise:	-70dBc/Hz@1KHz max. -80dBc/Hz@10KHz max. -90dBc/Hz@100KHz max.
Frequency Stability:	±1ppm max. @Internal Reference
External Reference:	10MHz, 0±3dBm
Voltage:	12~24V DC
Current:	500mA typ. @15V
Impedance:	50Ω

Input RF Frequency (GHz)	Output IF Frequency (MHz)	LO Frequency (GHz)	Simultaneous Output
18.2~19.2	950~1950	17.25	Out1
19.2~20.2		18.25	Out2

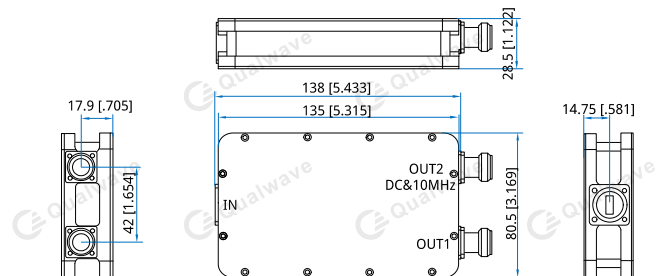
**Mechanical**

Size*1:	135*80.5*28.5mm 5.315*3.169*1.122in
RF Input Waveguide Size:	WR-42 (BJ220)
Flange:	FBM220
Ext.ref. Input(10MHz)/	N Female /SMA Female /75Ω F
IF Output Connectors:	Inch Thread Female
Weight:	500g max.

[1] Exclude connectors.

**Environmental**

Operating Temperature:	-40~+60°C
Operating Humidity:	0~100%

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

**How To Order**
**QLB-18200-20200-60-150-1-Z**

Z: Output connector type

Connector naming rules:

- N - N female
- S - SMA female
- F - F Inch Thread female

Examples:

To order a Block Downconverters (LNBs), 18.2~20.2GHz, 60dB, 150K, N female, specify QLB-18200-20200-60-150-1-N.

Customization is available upon request.