

# QC3-MG-T50-1

## 3.5mm Male

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

### Electrical

Frequency:	DC~26.5GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC min
Impedance:	50Ω

### Mechanical


RF Connector:	3.5mm Male
Mating Cable:	QT50
Outer Conductor:	303F stainless steel

### How To Order

#### QC3-MG-T50-1

Customization is available upon request.

### Outline Drawings

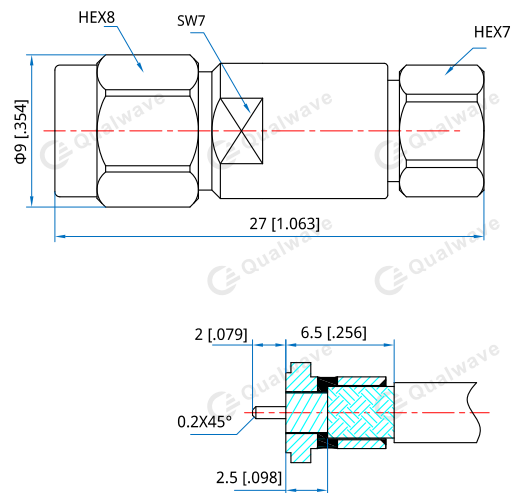

Unit: mm [in]  
Tolerance:  $\pm 0.2\text{mm}$  [ $\pm 0.008\text{in}$ ]