

QCD-FCB-RG142-1

SMB Female, Crimp

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~4GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Dielectric Withstanding Voltage:	500V
Impedance:	50Ω

Mechanical

RF Connector:	SMB female
Mating Cable:	RG142, RG142U, RG223, RG58
Mating Life Cycle:	500 cycles
Inner Conductor:	Gold plated beryllium copper
Dielectric:	PTFE
Outer Conductor:	Gold plated brass

Environmental


Temperature:	-55~+125°C
--------------	------------

How To Order

QCD-FCB-RG142-1

Customization is available upon request.

Outline Drawings

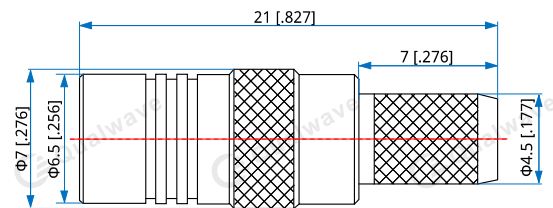

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]