

# QCF-MCB75-R1000-1

F Male, Crimp, 75 Ω

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics


## Electrical

Frequency:	DC~2GHz
Dielectric Withstanding Voltage:	750V rms min.
Center Contact Resistance:	6MΩ max.
Outer Contact Resistance:	1MΩ max.
Insulation Resistance:	1000MΩ min.
Impedance:	75Ω

## Mechanical

RF Connector:	F male
Operation Life:	500 Cycles
Mating Cable:	QR1000, LMR400
Outer Conductor:	Nickel Plated Brass
Insulator:	Teflon
Contact Pin:	Gold Plated Brass

## Outline Drawings

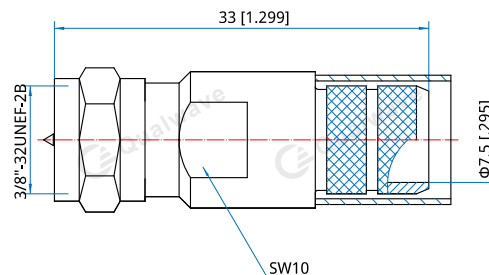

Unit: mm [in]  
Tolerance: ±0.5mm [±0.02in]

## How To Order

**QCF-MCB75-R1000-1**

Customization is available upon request.