

# QCK-FRG-T50-1

## 2.92mm Female Right Angle

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

### Electrical

Frequency:	DC-40GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	750V DC min
Impedance:	50Ω

### Mechanical


RF Connector:	2.92mm Female Right Angle
Mating Cable:	QT50
Outer Conductor:	303F stainless steel

### How To Order

#### QCK-FRG-T50-1

Customization is available upon request.

### Outline Drawings

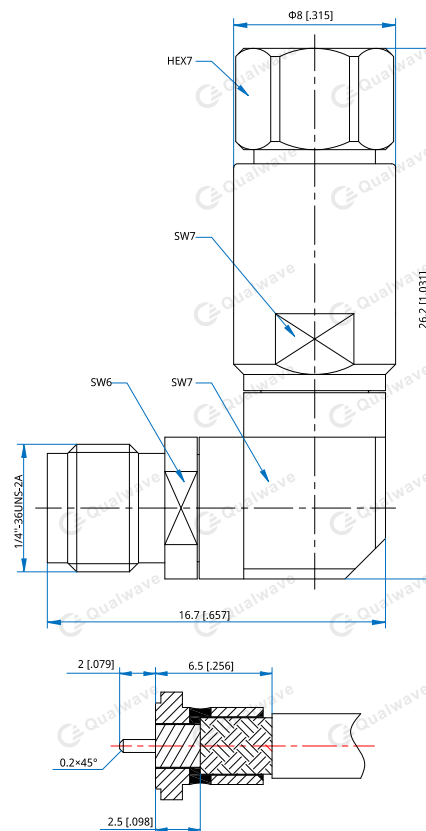

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]