

QCP-FB-086-3

SMP Female

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics



Electrical

Frequency: DC~40GHz
VSWR: 1.4 max.
Impedance: 50Ω

Mechanical


RF Connector: SMP Female
Mating Cable: QH280, QD086, QE086, RG316, RG316D
Outer Conductor: Beryllium copper

How To Order

QCP-FB-086-3

Customization is available upon request.

Outline Drawings

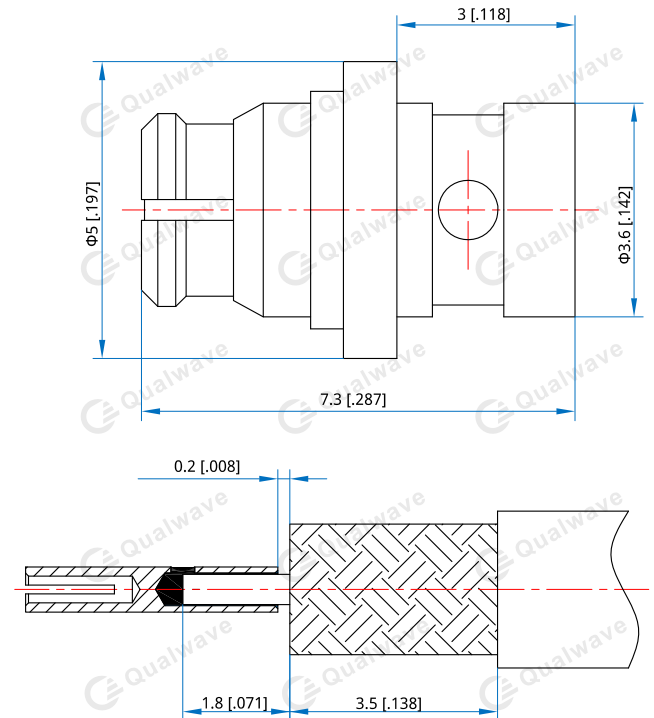

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]