


## QCS-FB-141-1

### SMA Female

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics




#### Electrical

Frequency:	DC~18GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC min.
Impedance:	50Ω

#### Mechanical

RF Connector:	SMA Female
Mating Cable:	QH400, QD141, QE141
Outer Conductor:	Gold plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated berylliums copper

#### Outline Drawings

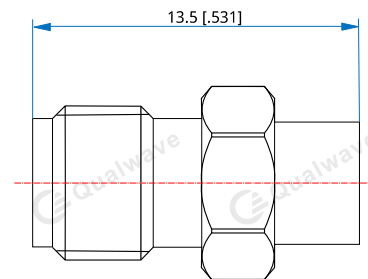

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

#### How To Order

[QCS-FB-141-1](#)

Customization is available upon request.