

QCS-MCB-R1000-1

SMA Male, Crimp

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency: DC~6GHz
VSWR: 1.15 max. DC~3GHz
Impedance: 50Ω


Mechanical

RF Connector: SMA male
Mating Cable: QR1000
Outer Conductor: Ternary alloy plated brass &
Nickel plated brass
Inner Conductor: Gold plated brass
Dielectric: PTFE

Environmental

Temperature: -45~+125°C

Outline Drawings

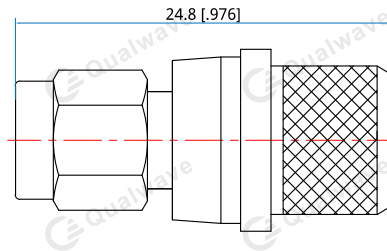

Unit: mm [in]
Tolerance: ± 0.2 mm [± 0.008 in]

How To Order

QCS-MCB-R1000-1

Customization is available upon request.