

## QAM0-85-P

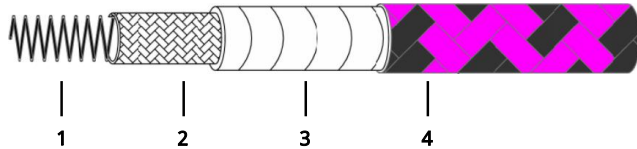
### Long Flex Life

**Features:**

- \* Long Flex Life
- \* High Durable

**Applications:**

- \* Laboratory Test
- \* Satellite Communication

**Construction**


No.	Name	Size (mm)	Material
1	Spring	10.90±0.1	Stainless Steel Wire
2	Outer Conductor	11.50±0.1	Tin Plated Braid
3	Inner Jacket	12.0±0.1	PTFE
4	Jacket	12.5±0.15	PTFE

**Environmental**

Temperature:	-40~+165°C
Water Proof:	No
Oil Proof:	No

**Mechanical**

Bend Radius (installation):	60mm
Bend Radius (repeated):	120mm
Spring Spiral Direction:	Right
Spring Zero Load Pitch:	2.0mm
Spring Wire Diameter:	1.2±0.05mm
Spring Inner Diameter:	8.5±0.1mm
Outer Conductor Coverage Rate:	90% min.
Inner Jacket Color:	White
Jacket Color:	Purple and Black

**How To Order**
**QAM0-85-P-X**

X: Length in meters

**Examples:**

To order a QAM0-85-P RF cable armor, 0.5 meter, specify QAM0-85-P-0.5.