

QWCK-28

WR-28, 26.3~40GHz


Features:
 * Broad Band
 * Low VSWR

Applications:
 * Calibration
 * Laboratory Test

Components

Part Number	Frequency (GHz)	VSWR (Max.)	Description	Material	Finish	Coating	Quantity (pcs)	Outline Drawings
QWCA-28-KF-R-1	26.3~40	1.2	Waveguide to coax adapter, WR-28 (BJ320) to 2.92mm(f), right angle, FBP320	Copper	Pickling passivation	Black paint	2	Outline A
QWT28-5-A-1	26.3~40	1.05	Low power waveguide termination, WR-28 (BJ320), 5W, FBP320	Aluminium	Conductive oxidation	Sea gray	1	Outline B
QWS28-C-1	26.3~40	-	Waveguide short, WR-28 (BJ320), 4mm, FBP320	Copper	-	-	1	Outline D
QWSS28-4-C-1	26.3~40	-	1/4λ Waveguide straight section, WR-28 (BJ320), 4mm, FBP320	Copper	-	-	1	Outline C
Storage Box	Aluminum Alloy						1	-
Screw							1 set	-

Outline Drawings

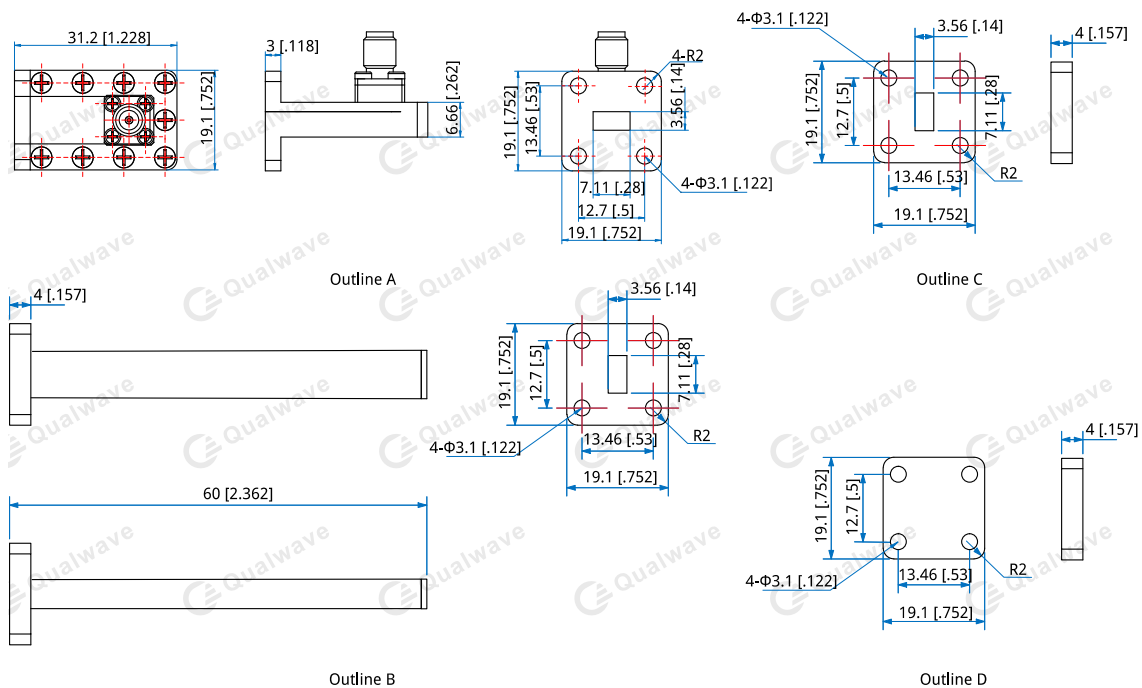

Unit: mm [in] Tolerance: ±0.5mm [±0.02in]

Environmental

Operating Temperature: -40~+85°C

Non-operating Temperature: -55~+150°C

How To Order**QWCK-28** All the 5 components in one box.