


# QA2P

## 2.4mm to SMP

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

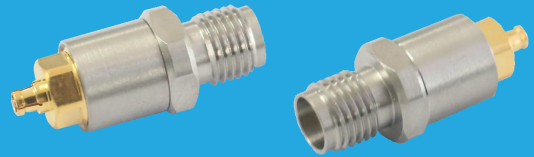

### Electrical

Frequency: DC~40GHz  
VSWR: 1.5 max.  
Impedance: 50Ω


### Mechanical

RF Connectors: 2.4mm  
SMP  
Mating Life Cycle: 500 cycles  
Outer Conductor: Passivated Stainless Steel  
Dielectric: PEI  
Inner Conductor: Gold Plated Beryllium Copper

### Environmental

Temperature: -50~+85°C

### Outline Drawings

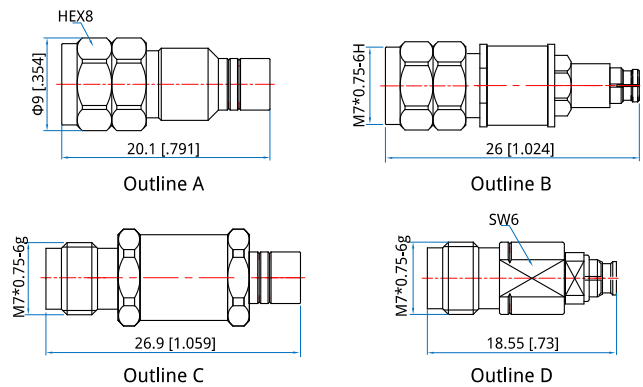

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**QA2P-MM** - 2.4mm (m) to SMP (m), Outline A

**QA2P-MF** - 2.4mm (m) to SMP (f), Outline B

**QA2P-FM** - 2.4mm (f) to SMP (m), Outline C

**QA2P-FF** - 2.4mm (f) to SMP (f), Outline D

Customization is available upon request.