


QA3N

3.5mm to N

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

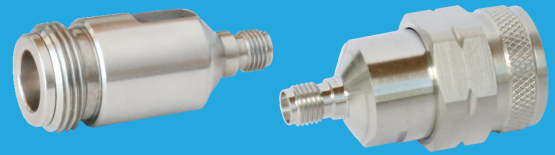

Electrical

Frequency: DC~18GHz
VSWR: 1.15 max.
Impedance: 50Ω


Mechanical

RF Connectors: 3.5mm
N
Mating Life Cycle: 2000 cycles
Outer Conductor: Passivated SUS303 Stainless Steel
Dielectric: PEI
Inner Conductor: Gold Plated Beryllium Copper

Environmental

Temperature: -60~+165°C

Outline Drawings

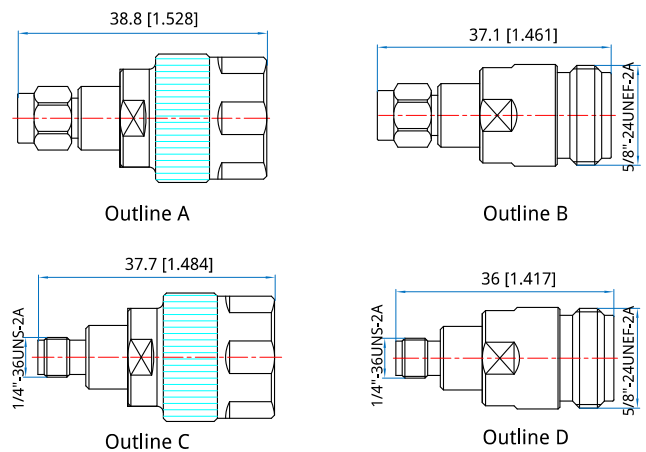

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

- QA3N-MM** - 3.5mm (m) to N (m), Outline A
- QA3N-MF** - 3.5mm (m) to N (f), Outline B
- QA3N-FM** - 3.5mm (f) to N (m), Outline C
- QA3N-FF** - 3.5mm (f) to N (f), Outline D

Customization is available upon request.