

QA55

1.35mm to 1.35mm

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar



Electrical

Frequency: DC~90GHz
VSWR: 1.3 max.
Impedance: 50Ω

Mechanical

RF Connectors: 1.35mm
Mating Life Cycle: 500 cycles
Outer Conductor: Passivated Stainless Steel
Dielectric: PEI
Inner Conductor: Gold plated beryllium copper

Environmental

Temperature: -55~+165°C

How To Order

QA55-MM - 1.35mm(m) to 1.35mm(m), Outline A


QA55-MF - 1.35mm(m) to 1.35mm(f), Outline B

QA55-FF - 1.35mm(f) to 1.35mm(f), Outline C

QA55H-FF - 1.35mm(f) to 1.35mm(f), Bulk head, Outline D

Customization is available upon request.

Outline Drawings

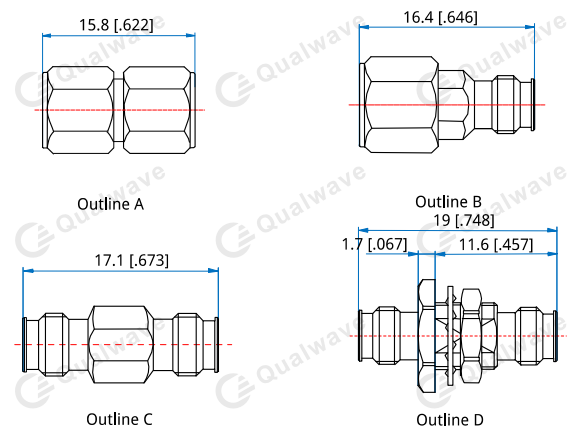

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]