


# QAAS

## SSMA to SMA

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

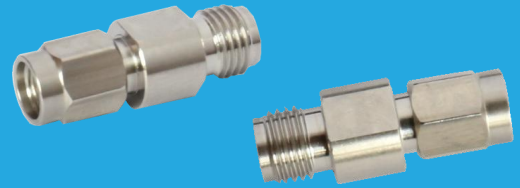

### Electrical

Frequency: DC~26.5GHz  
VSWR: 1.3 max.  
Insertion Loss: 0.3dB max.  
Impedance: 50Ω


### Mechanical

RF Connectors: SSMA  
SMA  
Mating Life Cycle: 500 cycles  
Outer Conductor: Passivated Stainless Steel  
Dielectric: PEI  
Inner Conductor: Gold Plated Beryllium Copper

### Environmental

Temperature: -55~+85°C

### Outline Drawings

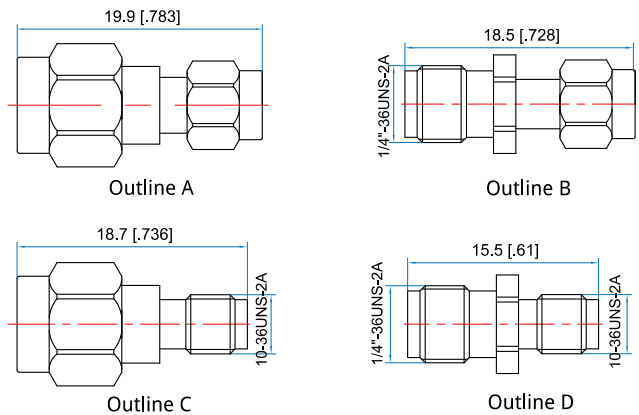

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**QAAS-MM** - SSMA(m) to SMA(m), Outline A

**QAAS-MF** - SSMA(m) to SMA(f), Outline B

**QAAS-FM** - SSMA(f) to SMA(m), Outline C

**QAAS-FF** - SSMA(f) to SMA(f), Outline D

Customization is available upon request.