

QAKK 2.92mm to 2.92mm

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC-40GHz
VSWR: 1.25 max.
Impedance: 50Ω

Mechanical

RF Connectors: 2.92mm
Mating Life Cycle: 500 cycles
Outer Conductor: Passivated Stainless Steel
Dielectric: PEI
Inner Conductor: Gold Plated Beryllium Copper

Environmental


Temperature: -60~+165°C

How To Order


- QAKK-MM** - 2.92mm (m) to 2.92mm (m), Outline A
- QAKK-MF** - 2.92mm (m) to 2.92mm (f), Outline B
- QAKK-FF** - 2.92mm (f) to 2.92mm (f), Outline C
- QAKKR-MM**-2.92mm (m) to 2.92mm (m) right angle, Outline D
- QAKKR-MF** - 2.92mm (m) to 2.92mm (f) right angle, Outline E
- QAKKR-FF** - 2.92mm (f) to 2.92mm (f) right angle, Outline F
- QAKKL-FF** - 2.92mm (f) to 2.92mm (f) flange mount, Outline G
- QAKKH-FF** - 2.92mm (f) to 2.92mm (f) bulk head, Outline H

Customization is available upon request.


Outline Drawings




Outline A




Outline B




Outline C




Outline D




Outline E



Outline F

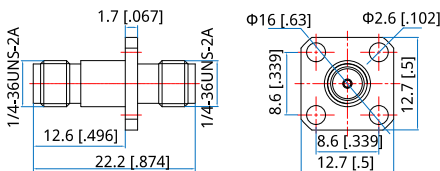

Outline G

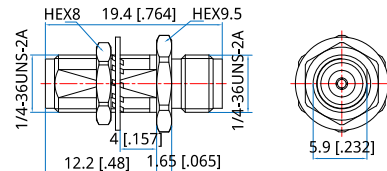

Outline H

Unit: mm [in] Tolerance: ±0.2mm [±0.008in]