


QAKN 2.92mm to N

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

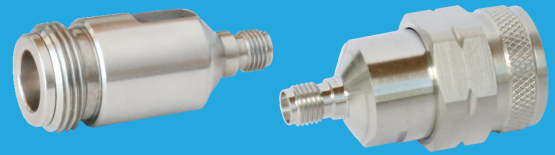

Electrical

| | |
|-----------------|-----------|
| Frequency: | DC~18GHz |
| VSWR: | 1.15 max. |
| Insertion Loss: | 0.3dB |
| Impedance: | 50Ω |


Mechanical

| | |
|--------------------|------------------------------|
| RF Connectors: | 2.92mm N |
| Mating Life Cycle: | 500 cycles |
| Outer Conductor: | SUS303 Stainless Steel |
| Dielectric: | PEI |
| Inner Conductor: | Gold Plated Beryllium Copper |

Environmental

| | |
|--------------|------------|
| Temperature: | -55~+125°C |
|--------------|------------|

Outline Drawings

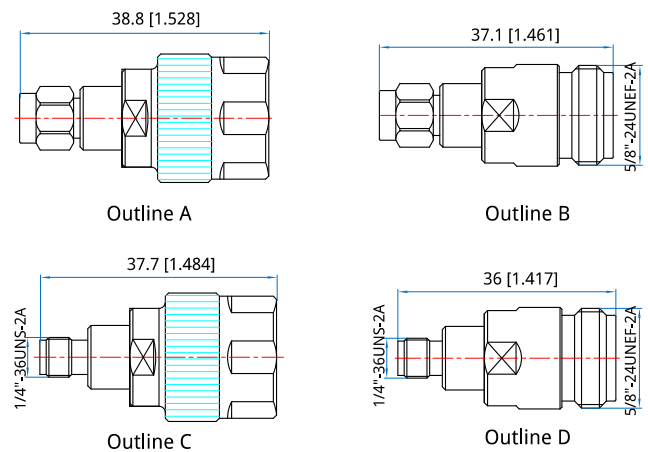

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

- QAKN-MM** - 2.92mm(m) to N(m), Outline A
- QAKN-MF** - 2.92mm(m) to N(f), Outline B
- QAKN-FM** - 2.92mm(f) to N(m), Outline C
- QAKN-FF** - 2.92mm(f) to N(f), Outline D

Customization is available upon request.