

QANE

N to SC

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~6GHz
VSWR: 1.25 max.
Impedance: 50Ω


Mechanical

RF Connectors: N
SC
Mating Life Cycle: 500 cycles
Outer Conductor: Nickel Plated Brass or SUS303
Stainless Steel
Dielectric: PTFE
Inner Conductor: Gold Plated Tin-phosphor
Bronze

Environmental

Temperature: -55~+85°C

Outline Drawings

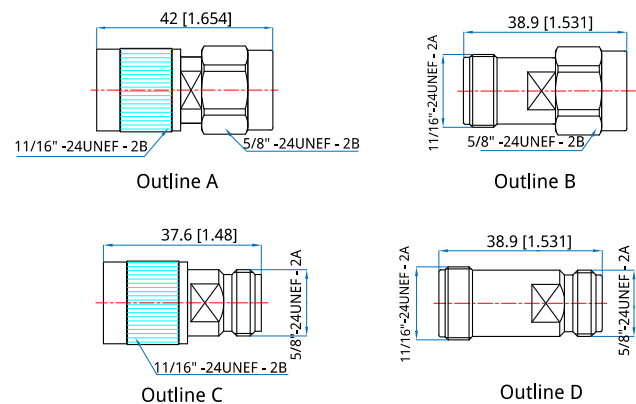

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QANE-MM - N (m) to SC (m), Outline A

QANE-MF - N (m) to SC (f), Outline B

QANE-FM - N (f) to SC (m), Outline C

QANE-FF - N (f) to SC (f), Outline D

Customization is available upon request.