


QAPS SMP to SMA

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

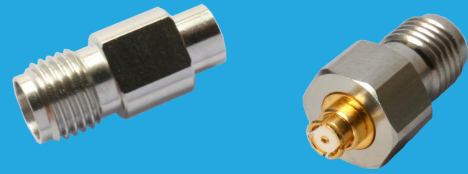

Electrical

Frequency:	DC~26.5GHz DC~18GHz (bulk head)
VSWR:	1.25 max.
Impedance:	50Ω

Mechanical

RF Connectors:	SMP SMA
Mating Life Cycle:	500 cycles
Outer Conductor:	Passivated Stainless Steel
Dielectric:	PTFE
Inner Conductor:	Gold Plated Beryllium Copper

Environmental


Temperature: -55~+85°C

How To Order


- QAPS-MM** - SMP(m) to SMA(m), Outline A
- QAPS-FF** - SMP(f) to SMA(f), Outline B
- QAPS-FM** - SMP(f) to SMA(m), Outline C
- QAPS-MF** - SMP(m) to SMA(f), Outline D
- QAPSH-MF** - SMP(m) to SMA(f) bulk head, Outline E
- QAPSH-FF-1** - SMP(f) to SMA(f) bulk head, Outline F
- QAPSH-FF-2** - SMP(f) to SMA(f) bulk head, Outline G

Customization is available upon request.


Outline Drawings




Outline A




Outline B




Outline C




Outline D



Outline E



Outline F



Outline G

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]