


QAPS

SMP to SMA

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

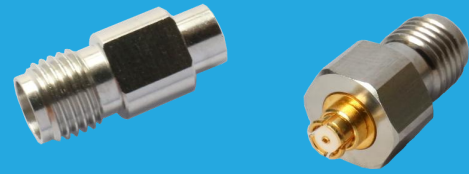

Electrical

Frequency: DC~26.5GHz
VSWR: 1.25 max.
Impedance: 50Ω


Mechanical

RF Connectors: SMP
SMA
Mating Life Cycle: 500 cycles
Outer Conductor: Passivated SUS303 Stainless Steel
Dielectric: PTFE
Inner Conductor: Gold Plated Beryllium Copper


Environmental

Temperature: -55~+85°C


Outline Drawings




Outline A



Outline B



Outline C



Outline D

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QAPS-MM - SMP(m) to SMA(m), Outline A

QAPS-FF - SMP(f) to SMA(f), Outline B

QAPS-FM - SMP(f) to SMA(m), Outline C

QAPS-MF - SMP(m) to SMA(f), Outline D

Customization is available upon request.