

QAQQ

QMA to QMA

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~6GHz
VSWR: 1.3 max.
Impedance: 50Ω

Mechanical

RF Connectors: QMA
Outer Conductor: Nickel plated brass
Dielectric: PTFE
Inner Conductor: Gold plated brass

Environmental

Temperature: -55~+165°C

How To Order


QAQQ-MM - QMA(m) to QMA(m), Outline A

QAQQ-MF - QMA(m) to QMA(f), Outline B

QAQQ-FF - QMA(f) to QMA(f), Outline C

Customization is available upon request.

Outline Drawings

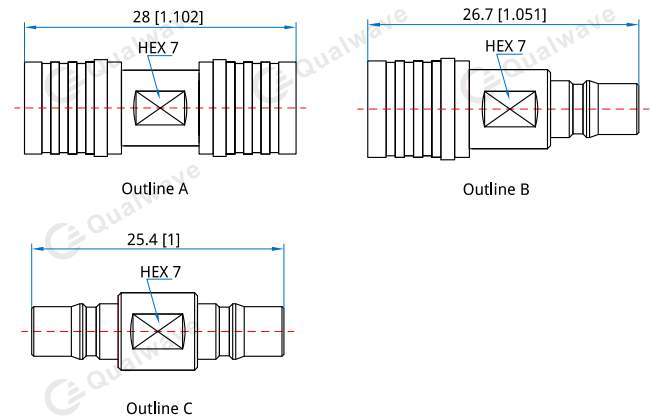

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]