

## QASB-B SMA to BNC

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar



### Electrical

Frequency: DC~3GHz (Outline E)  
DC~4GHz (Outline F, G)  
DC~6GHz  
VSWR: 1.15 max. (Outline F, G)  
1.25 max. (Outline E)  
1.35 max.  
Impedance: 50Ω

### Mechanical

RF Connectors: SMA  
BNC  
Outer Conductor: Nickel plated brass  
Dielectric: PTFE  
Inner Conductor: Gold plated brass or gold plated phosphor copper

### Environmental


Operating Temperature: -55~+155°C

### How To Order

- QASB-MM-B** - SMA(m) to BNC(m), Outline A
- QASB-FM-B** - SMA(f) to BNC(m), Outline B
- QASB-MF-B** - SMA(m) to BNC(f), Outline C
- QASB-FF-B** - SMA(f) to BNC(f), Outline D
- QASBH-FF-B** - SMA(f) to BNC(f) bulk head, Outline E
- QASBH-FF-B-1** - SMA(f) to BNC(f) bulk head, Outline F
- QASBL-FF-B** - SMA(f) to BNC(f) flange mount, Outline G

Customization is available upon request.

### Outline Drawings

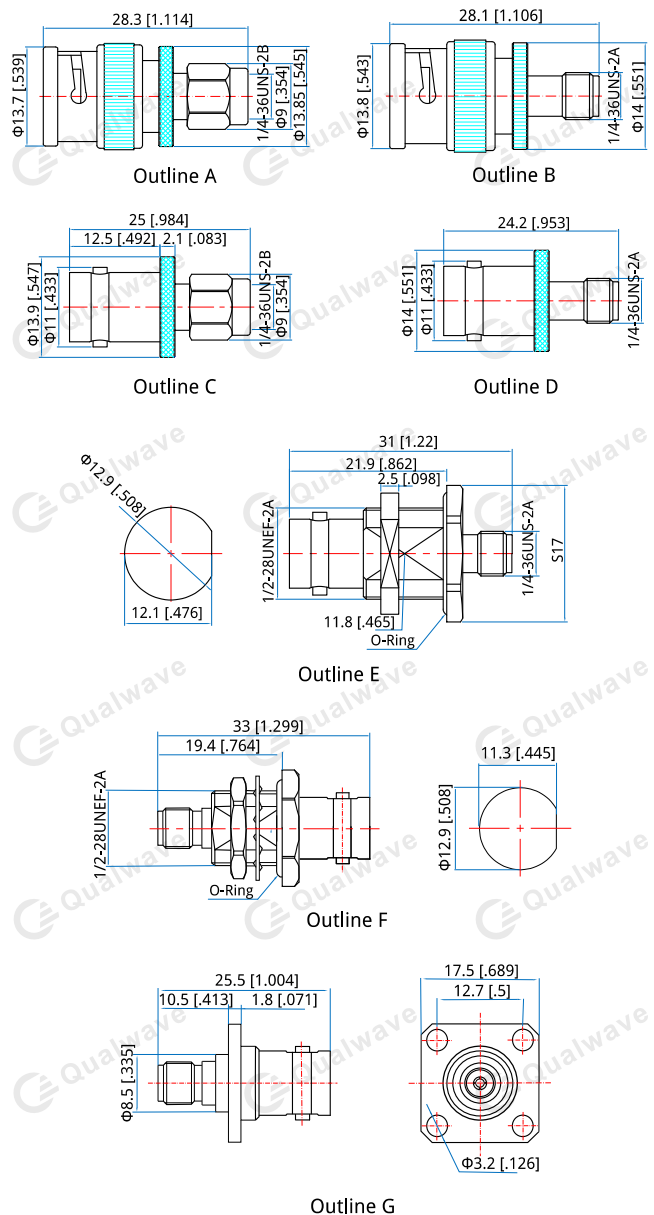

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]