

QATT

TNC to TNC

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	DC~18GHz
VSWR:	1.25 max.
VSWR (Right Angle):	1.5 max.
Impedance:	50Ω


Mechanical

RF Connectors:	TNC
Mating Life Cycle:	500 cycles
Outer Conductor:	SUS303 Stainless Steel
Dielectric:	PTFE
Inner Conductor:	Gold Plated Beryllium Copper

Environmental

Temperature:	-50~+85°C
--------------	-----------

Outline Drawings

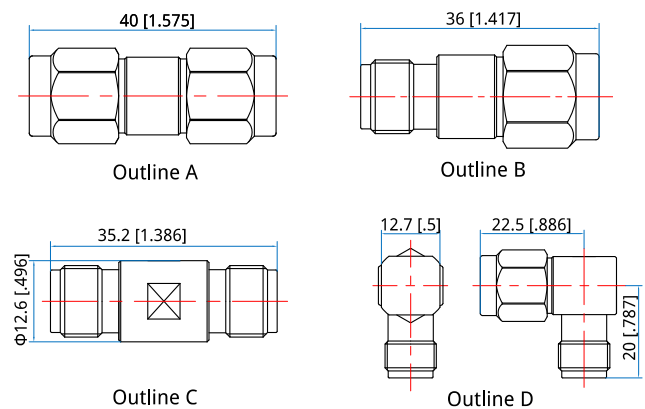

Unit: mm [in]
Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

QATT-MM - TNC(m) to TNC(m), Outline A

QATT-MF - TNC(m) to TNC(f), Outline B

QATT-FF - TNC(f) to TNC(f), Outline C

QATTR-MF - TNC(m) to TNC(f), right angle, Outline D

Customization is available upon request.