

# QCC-1000-1500

## Broadband & High Power

Features:  
 \* Broadband  
 \* High Power  
 \* Low Insertion Loss

Applications:  
 \* Wireless  
 \* Radar  
 \* Laboratory Test

### Electrical

Frequency:	1~1.5GHz
Insertion Loss:	0.6dB max.
Isolation:	16dB min.
VSWR:	1.4 max.
Forward Power*1:	200W
Reserve Power*1:	200W

[1] Power for SMA connector is 100W.

### Mechanical


Size*2:	34*34*22mm
	1.339*1.339*0.866in

[2] Exclude connectors.

### Environmental

Temperature:	0~+60°C
--------------	---------

### Outline Drawings

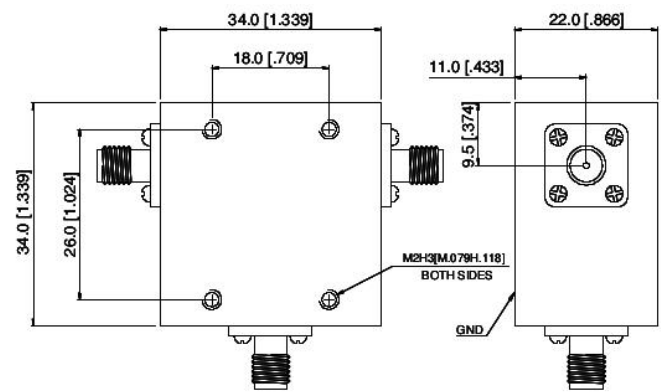

Unit: mm [inch]  
 Tolerance: ±0.2mm

### How To Order

**QCC-1000-1500-S** - SMA female

**QCC-1000-1500-N** - N female

Customization is available upon request.