

QCC-3000-6000

Broadband & High Power

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Wireless
- * Radar
- * Laboratory Test

Electrical

Frequency:	3~6GHz
Insertion Loss:	0.5dB max.
Isolation:	18dB min.
VSWR:	1.3 max.
Forward Power:	100W
Reserve Power:	100W

Mechanical


Size*1:	25.4*28*14mm
	1.000*1.102*0.551in

[1] Exclude connectors and terminations.

Environmental

Temperature:	-55~+85°C
--------------	-----------

Outline Drawings

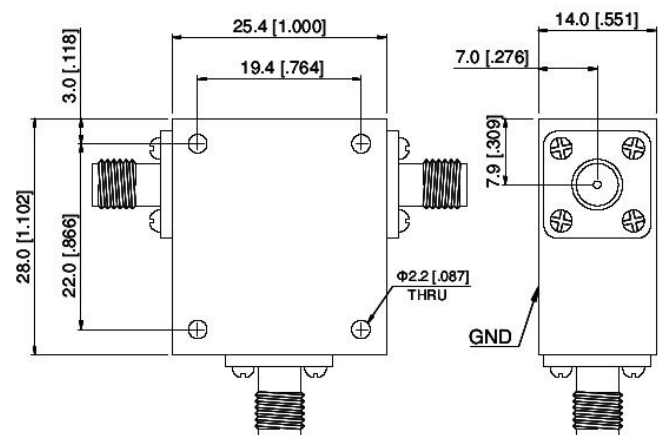

Unit: mm [inch]

Tolerance: ± 0.2 mm

How To Order

[QCC-3000-6000-S](#) - SMA female

[QCC-3000-6000-N](#) - N female

Customization is available upon request.