

## QCC-4000-8000-K3-N-1

4~8GHz, 300W

### Features:

- \* Broadband
- \* High Power
- \* Low Insertion Loss

### Applications:

- \* Wireless
- \* Radar
- \* Laboratory Test

### Electrical

Frequency:	4~8GHz
Insertion Loss:	0.6dB max.
Isolation:	15dB min.
VSWR:	1.5 max.
Average Power:	300W

### Mechanical


Size <sup>*1</sup> :	29.7*36*30mm 1.169*1.417*1.181in
RF Connectors:	N Female
Cooling:	Forced air
Direction:	Clockwise

[1] Exclude connectors.

### Environmental

Operating Temperature:	-20~+60°C
Non-operating Temperature:	-55~+85°C

### Outline Drawings

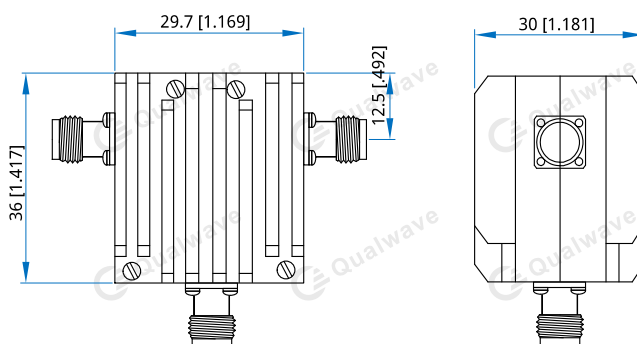

Unit: mm [in]

Tolerance:  $\pm 0.2$ mm [ $\pm 0.008$ in]

### How To Order

**QCC-4000-8000-K3-N-1**

Customization is available upon request.