

# QCC-4000-8000

## Broadband & High Power

- |                      |                      |
|----------------------|----------------------|
| <b>Features:</b>     | <b>Applications:</b> |
| * Broadband          | * Wireless           |
| * High Power         | * Radar              |
| * Low Insertion Loss | * Laboratory Test    |

### Electrical

Frequency:	4~8GHz
Insertion Loss:	0.5dB max.
Isolation:	18dB min.
VSWR:	1.3 max.
Forward Power:	100W
Reserve Power:	100W

### Mechanical


Size*1:	21*22.5*15mm
	0.827*0.886*0.591in

[1] Exclude connectors.

### Environmental

Temperature:	-55~+85°C
--------------	-----------

### Outline Drawings

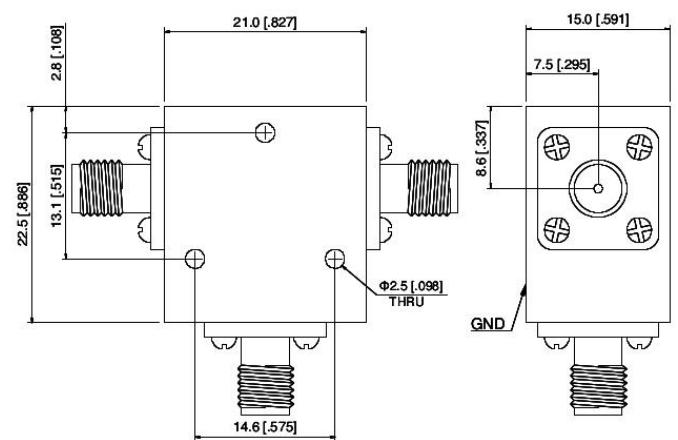

Unit: mm [inch]  
Tolerance: ±0.2mm

### How To Order

[QCC-4000-8000-S](#) - SMA female

[QCC-4000-8000-N](#) - N female

Customization is available upon request.