

## QCC-56-86

### Broadband & High Power

**Features:**

- \* Broadband
- \* High Power
- \* Low Insertion Loss

**Applications:**

- \* Wireless
- \* Radar
- \* Laboratory Test

#### Electrical

|                 |            |
|-----------------|------------|
| Frequency:      | 56~86MHz   |
| Insertion Loss: | 1.5dB max. |
| Isolation:      | 16dB min.  |
| VSWR:           | 1.4 max.   |
| Forward Power:  | 60W        |
| Reverse Power:  | 60W        |

#### Mechanical


|         |                                   |
|---------|-----------------------------------|
| Size*1: | 64*66*22mm<br>2.520*2.598*0.866in |
|---------|-----------------------------------|

[1] Exclude connectors.

#### Environmental

|              |           |
|--------------|-----------|
| Temperature: | +10~+60°C |
|--------------|-----------|

#### Outline Drawings

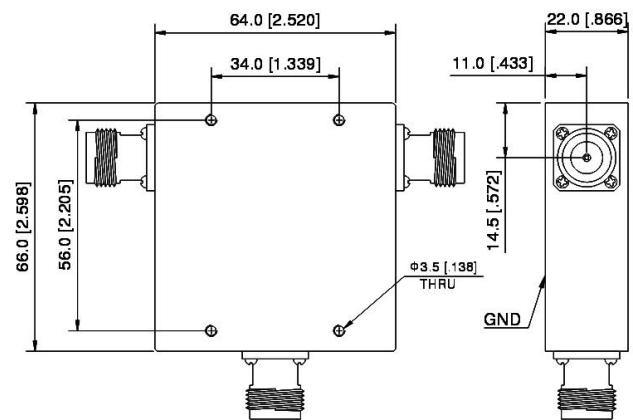

Unit: mm [inch]

Tolerance: ±0.2mm

#### How To Order

**QCC-56-86-S** - SMA female

**QCC-56-86-N** - N female

Customization is available upon request.