

QCC-700-900

Broadband & High Power

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Wireless
- * Radar
- * Laboratory Test

Electrical

Frequency:	700~900MHz
Insertion Loss:	0.4dB max.
Isolation:	18dB min.
VSWR:	1.3 max.
Forward Power ^{*1} :	200W
Reserve Power ^{*1} :	200W

[1] Power for SMA connector is 100W.

Mechanical


Size ^{*2} :	34*34*22mm
	1.339*1.339*0.866in

[2] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings

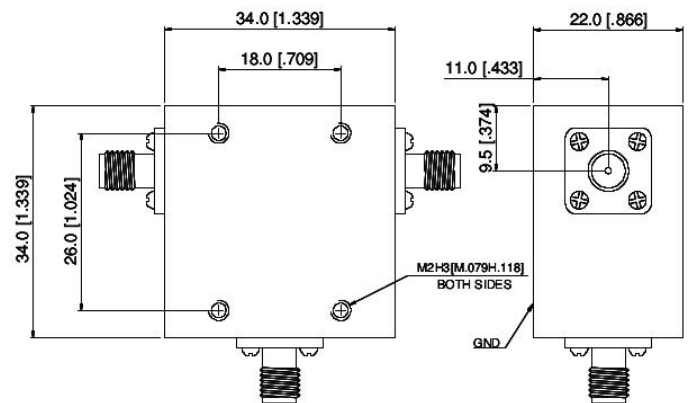

Unit: mm [inch]
Tolerance: ±0.2mm

How To Order

[QCC-700-900-S](#) - SMA female

[QCC-700-900-N](#) - N female

Customization is available upon request.