

QCC-950-1415

Broadband & High Power

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Wireless
- * Radar
- * Laboratory Test

Electrical

Frequency:	0.95~1.415MHz
Insertion Loss:	0.6dB max.
Isolation:	18dB min.
VSWR:	1.3 max.
Forward Power* ¹ :	200W
Reserve Power:	30W

[1] Forward Power for SMA connector is 100W.

Mechanical


Size* ² :	34*34*22mm
	1.339*1.339*0.866in

[2] Exclude connectors and terminations.

Environmental

Temperature:	0~+60°C
--------------	---------

Outline Drawings

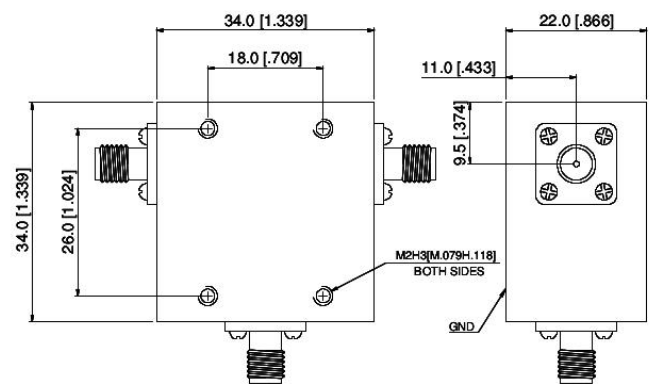

Unit: mm [inch]
Tolerance: ±0.2mm

How To Order

QCC-950-1415-S - SMA female

QCC-950-1415-N - N female

Customization is available upon request.