

QCC-960-1215

Broadband & High Power

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Wireless
- * Radar
- * Laboratory Test

Electrical

Frequency:	0.96~1.215MHz
Insertion Loss:	0.4dB max.
Isolation:	20dB min.
VSWR:	1.25 max.
Forward Power*1:	200W
Reserve Power:	30W

[1] Forward Power for SMA connector is 100W.

Mechanical


Size*2:	32*32*18mm
	1.260*1.260*0.709in

[2] Exclude connectors and terminations.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings

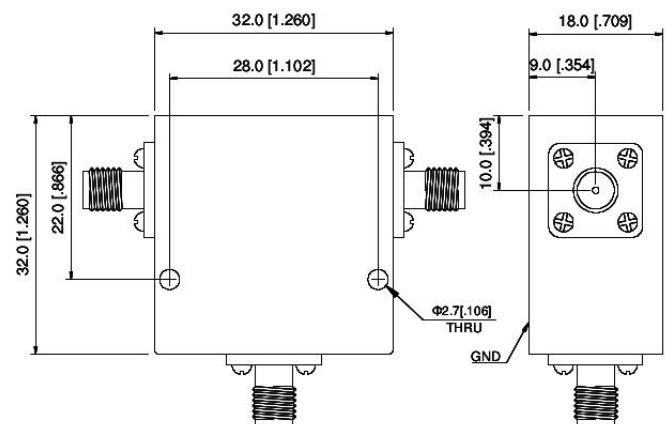

Unit: mm [inch]
Tolerance: ±0.2mm

How To Order

QCC-960-1215-S - SMA female

QCC-960-1215-N - N female

Customization is available upon request.