

QCI-1000-2000-K3-K2-N-1

1~2GHz, 300W/200W, N Female, Clockwise

Features:
 * Broadband
 * High Power
 * Low Insertion Loss

Applications:
 * Wireless
 * Radar
 * Laboratory Test

Electrical

Frequency:	1~2GHz
VSWR:	1.6 max.
Insertion Loss:	0.6dB max.
Isolation:	16dB min.
Forward Power:	300W
Reverse Power:	200W

Mechanical


Size ^{*1} :	64*66*26mm 2.52*2.598*1.024in
RF Connectors:	N Female
Mounting:	3-M2.5, depth 4mm
Direction:	Clockwise

[1] Exclude connectors and terminations.

Environmental

Operating Temperature:	-20~+60°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

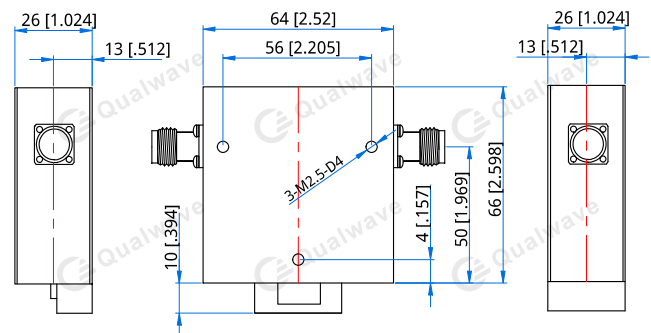

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

QCI-1000-2000-K3-K2-N-1

Customization is available upon request.