

QMS2S-22-2
DC~22GHz, SPDT

Features:

- * High Power
- * Long Operation Life

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	DC~22GHz
VSWR:	1.5 max.
Insertion Loss:	0.5dB max.
Isolation:	50dB min.
Average Power:	50W
Impedance:	50Ω

Mechanical


Size*1:	34*22.05*13.2mm 1.339*0.868*0.52in
Switching Sequence:	Break before Make
Operation Life:	1M Cycles
RF Connectors:	SMA Female
Power Supply & Control	Manual
Interface Connectors:	
Mounting:	2-Φ3.2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-25~+65°C
Non-Operating Temperature:	-55~+85°C

Outline Drawings

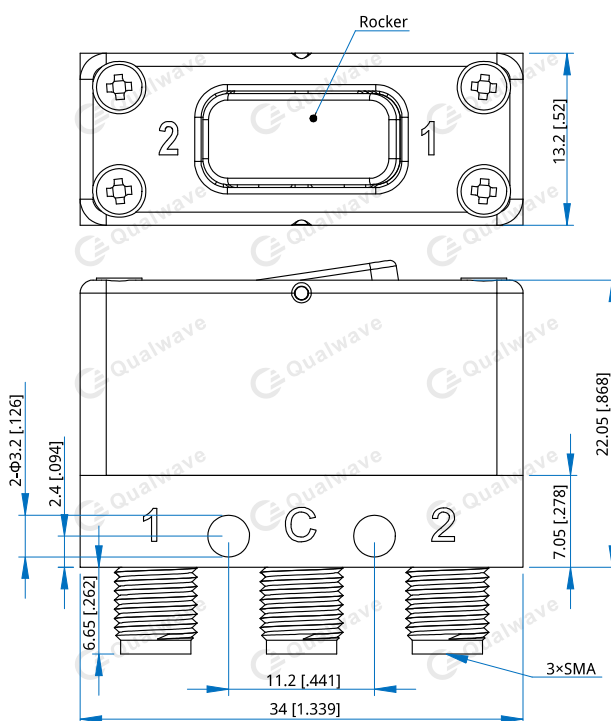

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.012\text{in}$]

How To Order

QMS2S-22-2

Customization is available upon request.