


QMS8S

DC~18GHz, SP7T~SP8T

Features:
 * High Power
 * Long Operation Life

Applications:
 * Wireless
 * Transmitter
 * Laboratory Test
 * Radar



Electrical

Frequency:	DC~18GHz				
Impedance:	50Ω				
Frequency range (GHz)	Insertion Loss (dB)	Isolation (dB)	VSWR		
DC~4	0.2	75	1.2		
4~8	0.3	65	1.3		
8~12.4	0.4	60	1.4		
12.4~18	0.6	60	1.6		
Voltage (V)	+12	+18	+24	+28	
Current (mA)	Normally Open	290	190	150	100

Mechanical

Size*1:	42*L*42mm 1.654*L*1.654in			
Weight:	185g			
Switching Sequence:	Break before Make			
Switching Time:	15mS max.			
Operation Life:	1M Cycles			
Vibration (operating):	20-2000Hz, 10G RMS			
Mechanical Shock (non-operating):	50G, 1/2sine, 11mS			
RF Connectors:	SMA Female			
Power Supply & Control Interface Connectors:	D-Sub 15			
Mounting:	4-Φ3.8mm through-hole			

[1] Exclude connectors.

Pin Numbering

Pin	Function	Pin	Function
1~8	V1~V8/A1~A8	14~14	NA
9	COM	15	V (TTL Only)


Port

SP7T	1~7	SP8T	1~8
------	-----	------	-----

Environmental

Temperature:	-25~+65°C
Extended Temperature:	-55~+85°C

Outline Drawings

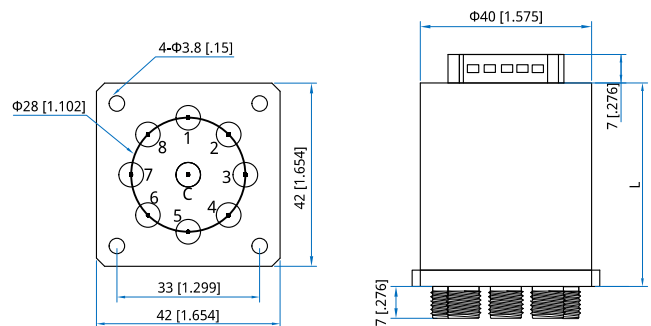

Height (L)	Standard	TTL
mm	62	72
in	2.44	2.84

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

Additional Options

TTL: T Indicators: I Extended Temperature: Z

How To Order

QMSVS-F-WXYZ

V: 7~8 (SP7T~SP8T)

F: Frequency in GHz

W: Actuator Type. Normally Open: 3.

X: Voltage. +12V: E, +18V: H, +24V: K, +28V: M.

Y: Power Interface. D-Sub: 1.

Z: Additional Options.

Examples:

To order a SP8T switch, DC-18GHz, Normally Open, +12V, D-Sub, TTL, Indicators, specify QMS8S-18-3E1TI.

Customization is available upon request.