

QDB-0.7-67000-VVF

700KHz~67GHz

Features:
 * Broadband
 * Low VSWR

Applications:
 * Telecom
 * Instrumentation
 * Laboratory Test
 * Radar

Electrical

Frequency Range: 700KHz~67GHz
 Impedance: 50Ω
 Voltage: 16V max.
 50V max.

Frequency (GHz)	Insertion Loss (dB max.)	VSWR (max.)
700KHz~0.01	0.9	1.9
0.01~67	1.0	1.45


Mechanical

Length: 26.9mm
 1.059in
 Connectors: 1.85mm male
 1.85mm female
 Outer Conductors: Stainless Steel
 Female Inner Conductors: Gold Plated Beryllium Copper
 Male Inner Conductors: Gold Plated Beryllium Copper

Environmental

Operating Temperature: -55~+125°C

Outline Drawings

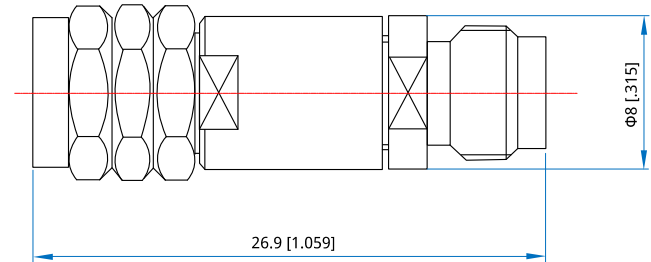

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QDB-0.7-67000-VVF-A - 16V

QDB-0.7-67000-VVF-B - 50V

Customization is available upon request.